
# **CFF Series**

## Particulate Removal Vessels

### **CRITICAL FUEL SYSTEMS**

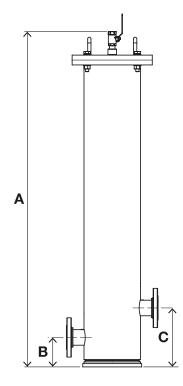

### In-line Particulate Removal

Maintaining fuel cleanliness is essential during high usage events, when fuel consumption is highest and quality is most critical. Designed for integration into facility fuel transfer lines, Kaydon's particulate removal vessels efficiently remove particulates and exceed the most stringent OEM ISO Cleanliness Codes in a single pass without sacrificing filter element life.

Model #	Target Flow Rate		Approx. Dimensions (in)2				Approx. Weight (lbs)		Inlet / Oulet	Element
	GPM	LPM	Α	В	С	Ø	Dry	Full	Connections	Quantity
CFF-50⁵	50	189	33	3.5	8.5	9	150	225	1.5"	<b>1</b> <sup>3</sup>
CFF-100 <sup>5</sup>	100	378	51	4.5	9	9	200	300	2"	1
CFF-300 <sup>5</sup>	300	1135	59	5	10	16	600	875	3"	3

Specifications			
Fluid Compatibility	#2 Diesel Bio-Diesel Blends (< B20) Hydrotreated Vegetable Oil (HVO)		
Max Design Flow Rate <sup>1</sup>	300 gpm / 1135 lpm		
Design Pressure	150 psi / 10.3 Bar		
Materials of Construction	Carbon Steel or Stainless Steel		
Exterior Coating	C4 Classification Paint (ISO 12944)		
Interior Coating	Ероху		
Vessel Design	ASME Sec. VIII, Div. I U-Stamped		
Inlet/Outlet Connection	Flanged or NPT		
Pressure Gauge Ports	1/4" NPT		
Drain Ports	3/4" NPT		
Performance (Single-Pass)	ISO Cleanliness: tbd		

Elements									
PN	Ø (in)	Length (in)	$\beta_{\mu} \geq 1000$	ISO Cleanliness					
CF-36-3	6	36	7.1	18/16/13					
CF-36-02	6	36	4.2	15/13/11					

#### **Optional Features**

- Automatic Air Relief Valve
- Automatic Pressure Relief Valve
- Pressure Gauges (pre-installed or shipped loose)
- Elements pre-installed
- Higher design pressures and flow rates available upon request
- Non-Stamped (U) Vessels available to ship from stock4

Filtration Group®

KAYDON FILTRATION



<sup>1.</sup> For Bio-Diesel blends, flow rates and performance may be reduced. Contact Kaydon for more detail

<sup>2.</sup> Actual dimensions to be confirmed with customer approval drawing

<sup>3.</sup> Uses single 6" x 18" element

Available in 50 gpm and 100 gpm.
Non-ASME vessel weights and dimensions may vary. Contact Kaydon for more detail