


# TURBO-TOC®

## Turbine Oil Conditioning Systems

### KLP SERIES

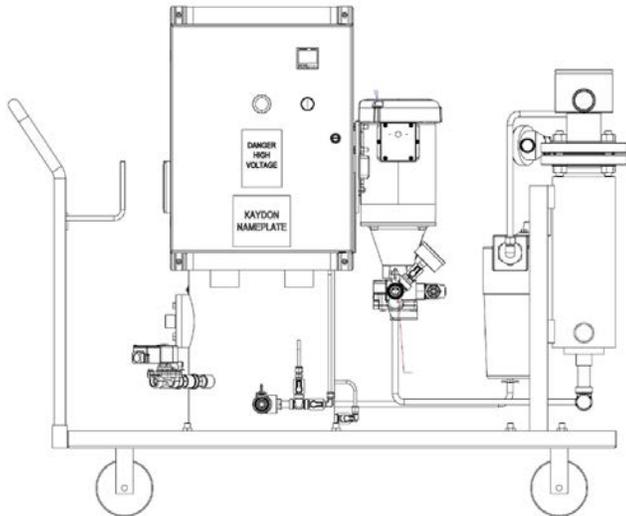

The Turbo-TOC® KLP Series provides the same fluid cleanliness performance as the KL line in a compact, mobile platform designed for systems up to 1,800 gallons. Ideal for service teams or facilities with multiple smaller reservoirs, KLP units deliver ISO-compliant particulate and water removal with field flexibility, making them a strategic solution for planned maintenance, commissioning, or rotating equipment support.

Elements		KLP-3	KLP-5	KLP-20
Prefilter	PN	KMP9600AKF8B	KMP9600AKF8B	K1100
	Qty	1	1	1
Coalescer	PN	C220270	C220270	K2100
	Qty	2	2	2
Separator	PN	C220271	C220271	K3100
	Qty	1	1	1

		KLP-3	KLP-5	KLP-20
Flow Rate	gpm	3	6	20
	lpm	11	23	76
Reservoir Size	gallons	≤ 720	721 - 1800	2401 - 4800
	liters	≤ 2725	2726 - 6800	9081 - 18200
Performance		ISO Cleanliness: 15/13/11 Total water: < 100 ppm		
Fluid Compatibility		Mineral-based Turbine Oil		
Maximum Viscosity		ISO 68		
Design Pressure		100 psi / 6.9 Bar	100 psi / 6.9 Bar	150 psi / 10.3 Bar
Approximate Dimensions (in)		38 L x 26 W x 44 H	48 L x 30 W x 44 H	71 L x 44 W x 87 H
Approximate Weight (lbs.)	Dry	400	500	2050
	Full	500	600	2550
Materials of Construction		Carbon Steel, Bronze, Stainless Steel, Buna-N		
Coating		Exterior: C4 Classification Paint (ISO 12944) Interior: Epoxy		
Vessel Design		ASME Sec. VIII, Div. I (Non-Stamped) <sup>1</sup>	ASME Sec. VIII, Div. I (Non-Stamped) <sup>1</sup>	ASME Sec. VIII, Div. I (U-Stamped)
Inlet Connection		¾" NPT	¾" NPT	2" RF Flange
Outlet Connection		½" NPT	½" NPT	1 ½" RF Flange
Water Drain		Manual	Automatic	Automatic
Water Level Detection		Visual Sight Glass		
Voltage		120 VAC / 60 Hz / 1 PH	460 VAC / 60 Hz / 3 PH	460 VAC / 60 Hz / 3 PH
Pump Motor Rating		0.5 HP / 0.37 KW	0.75 HP / 0.56 KW	3 HP / 2.2 KW
Oil Heater Rating		N/A	2.5 KW	15 KW
Controls		NEMA 4 Control Panel with PLC and Touch Screen Interface		

