
CFS Series Fuel Polishing Skids

CRITICAL FUEL SYSTEMS

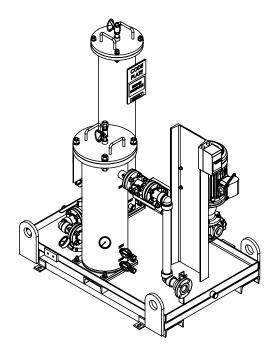

Ideal Solution for Continuous Storage Tank Maintenance

Kaydon's Critical Fuel Skid combines our advanced particulate removal and water separation technologies to remove 100% of damaging water and deliver ISO cleanliness codes far exceeding the most stringent industry standards. This packaged solution draws fuel from bulk storage, polishes it, and returns it back to storage on a continuous or as-needed basis, ensuring diesel life and protecting the critical components of modern diesel generator engines.

Specifications			
Performance (Single-Pass)	ISO Cleanliness: 15/13/11 Water Removal: 100% removal of free and emulsified water		
Fluid Compatibility	#2 Diesel Bio-Diesel Blends (< B20)1 Hydrotreated Vegetable Oil (HVO)		
Design Flow Rates	10 gpm / 38 lpm 30 gpm / 113 lpm		
Part Numbers	CFS-10 (10 gpm) CFS-30 (30 gpm)		
Design Pressure	150 psi / 10.3 Bar		
Approximate Dimensions (in)	48 L x 35 W x 55 H		
Approximate Weight (lbs.)	Dry: 925 Full: 1100		
Materials of Construction	Carbon Steel Buna-N Seals		
Exterior Coating	C4 Classification Paint (ISO 12944)		
Interior Coating	Ероху		
Vessel Design	ASME Sec. VIII, Div. I		
Inlet Connection	1 ½" NPT		
Outlet Connection	1 1/2" RF Flange		
Pressure Gauge Ports	1/4" NPT		
Drain Valve (Prefilter)	34" NPT		
Drain Valve (Coalescer)	½" NPT		
Water Drain:	Manual Ball Valve		
Water Level Detection:	Visual Water Level Sight Glass		
Pump Motor	10 gpm: 1.5 HP / 460VAC 30 gpm: 5 HP / 460VAC		
Controls	Manual Start/Stop control NEMA 4 Enclosure		

Elements								
Туре	PN	Ø (in)	Length (in)	$\beta_{\mu} \geq 1000$	Qty			
					10 gpm	30 gpm		
Pre-filter	CF-36-5	6	36	4.2	1	1		
Coalescer	CF-36-3	3.5	20	-	1	3		
Separator	CF-36-02	4	20	-	1	3		

Optional Features

- Automatic Air Relief Valve
- Automatic Pressure Relief Valve
- Programmable Logic Controller with touch screen HMI
- Inlet/Outlet sample ports with isolation valve
- Variable Frequency Drive
- Higher design pressures and flow rates available upon request

1. For Bio-Diesel blends, flow rates and performance may be reduced. Contact Kaydon for more detail 2. Actual dimensions to be confirmed with customer approval drawing



